



CORDPLAST®

AEROCORD PU-H

APPLICATION - ANWENDUNG -
USO - APPLICATION

[EN] Suitable for suction of abrasive dust and for contact with food with a presence of oils and fats according to EU regulation 10/2011 simulants a, b, c, d2 and e. Product recommended in panel beaters, wood industry, ceramic industry and in pharmaceutical industry

[DE] Zum absaugen von luft und rauch besonders für die landwirtschaft, karosseriewerkstätten und die keramik-, holz- und pharmaindustrie geeignet.

[ES] Para aspiracion de polvos abrasivos y idoneo al contacto con alimentos con contenido de aceites y grasas secos segun regulacion UE 10/2011 simulantes a, b, c, d2 y e muy indicado en las carrocerías, en la industria de la madera, de la ceramica y en la industria farmaceutica.

[FR] Pour l'aspiration d'air et de fumée dans les secteurs de l'agriculture, carrosserie, céramique, menuiserie et industrie pharmaceutique

STRUCTURE - AUFBAU -
ESTRUCTURA - STRUCTURE

[EN] **Construction:** Polyurethane hose with galvanized steel copper spiral wire. Transparent, spirale cuivrée.

Cover: In polyurethane, excellent resistance to abrasion


[DE] **Konstruktion:** Flexible polyuretham-schlauch mit kupferüberzogener spirale aus saitenstahl. Durchsichtig, verkupfert spirale.

Decke: Aus polyurethane, gute reibbeständigkeit

[ES] **Construcción:** Manguera en poliuretano con espiral armonica de acero cobreada.

Cobertura: En poliuretano muy resistente a la abrasion

[FR] **Construction:** Tuyau flexible en polyurethane avec spirale en acier harmonique cuivre. **Revetement:** En polyurethane, extremement resistant a l'abrasion

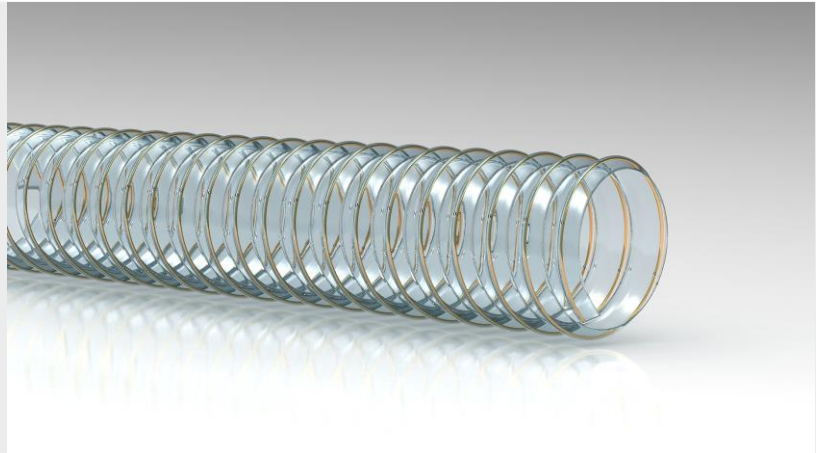

mm	bar	bar	gr/mt	mm	mt
25	1	0,3	180	25	20
30	1	0,3	200	30	20
32	1	0,3	240	32	20
38	1	0,3	250	38	20
40	1	0,3	270	40	20
45	1	0,3	280	45	20
50	1	0,3	330	50	20
60	1	0,3	440	60	20
63	1	0,3	460	63	20
70	1	0,25	490	70	20
75	1	0,25	530	75	20
80	1	0,25	500	80	20
90	1	0,25	680	90	20
100	1	0,25	700	100	20
110	1	0,25	720	110	20
120	1	0,25	1000	120	20
127	0.5	0,25	1100	127	20
130	0.5	0,12	1100	130	20
140	0.5	0,12	1150	140	20
152	0.5	0,12	1250	152	20
160	0.5	0,1	1280	160	20
180	0.5	0,05	1350	180	20
203	0.5	0,05	1500	203	20
254	0.5	0,03	2300	254	10
305	0.5	0,03	3200	305	10

RECOMMENDED CLAMP/COLLAR -
EMPFOHLENE KLAMMER/KRAGEN -
ABRAZADERA/COLLAR
RECOMENDADO -
COLLIER/COLLIER RECOMMANDÉ

STF - Hose clamps with screw
STC - Hose clamps with bolt
SBV - Double wire screw



-40°C / +90°C
-40°F / +194°F



NORM.: ISO 1307
AXIAL COMPRESSIBILITY: 8 a 1